


FIXED SCREWS HEX, ROUND

LOAD CHART

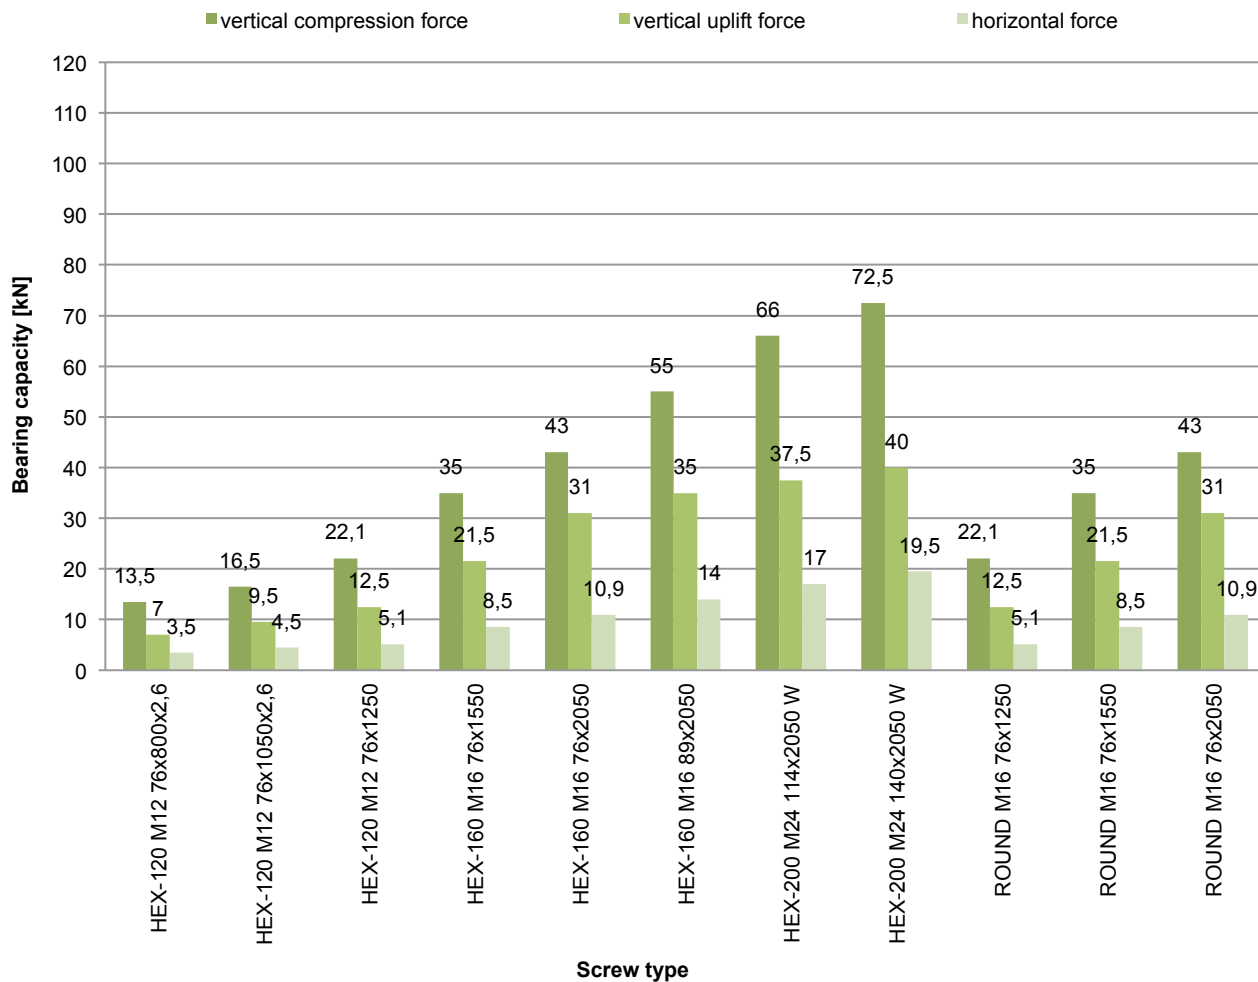

Listed values of load capacity were determined in the soil type: semisolid loam.

Values are reduced by a safety factor of 35%.


Values in the graph are only approximate.

Screws must be selected on the basis of static calculations and results of ground tension tests on the site.

The manufacturer is not liable for any damage due to insufficient or incorrect selection of screws.

FIXED SCREWS NUT, RIM

LOAD CHART

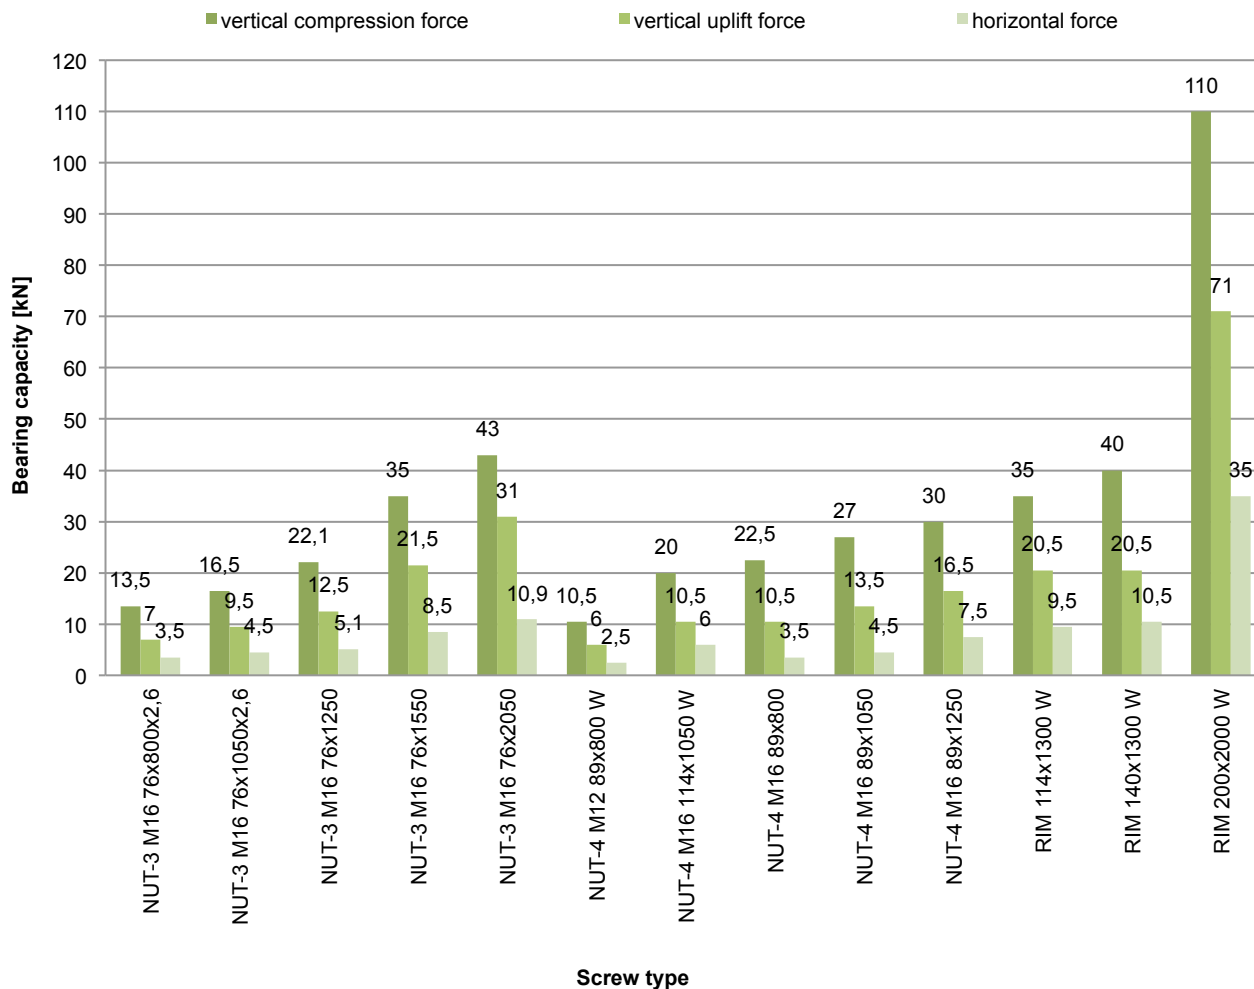

Listed values of load capacity were determined in the soil type: semisolid loam.

Values are reduced by a safety factor of 35%.

Values in the graph are only approximate.

Screws must be selected on the basis of static calculations and results of ground tension tests on the site.

The manufacturer is not liable for any damage due to insufficient or incorrect selection of screws.